

AC 110

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 602



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested according to EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	110,00	88,00	100,00	80,00	144,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

OPTIONAL EQUIPMENTS

ENGINE

- Remote Radiator Cooling
- Electronic governor control
- Fuel-Water Separator Filter
- Low water level alarm
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- Main line circuit breaker

CONTROL SYSTEM

- Remote annunciator panel
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Double wall chassis
- Supplied with oil and coolant - 30 °C
- Battery isolating switch
- Main Fuel Tank

TRANSFER SWITCH

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

AC 110

Engine : Cummins
Alternator : Mecc Alte
Control System : P 602

➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Cummins		
Model		6BTA 5,9-G5		
No. of Cylinders and Build		6 Cylinder, In Line		
Aspiration and Cooling		Turbo Charged and After Cooled		
Maximum Standby Power		1500 rpm		
		102,00 kW [137,00HP]		
Total Displacement	L	5,900		
Bore and Stroke	mm	102 x 120		
Compression Ratio		17,6:1		
Rated Speed (rpm)	rpm	1500		
Governor		Electronic		
Oil Capacity	L	16,40		
Coolant Capacity	L	19,80		
Intake Air Flow	m ³ /min.	7,86		
Radiator Cooling Air	m ³ /min.	216,00		
Exhaust Gas Flow	m ³ /min.	21,42		
Exhaust Gas Temperature	° C	533,00		
Start System		12 V d.c.		
Fuel Consumption	Load	%100	%75	%50
	L/h	25,00	18,00	12,00

➤ ALTERNATOR SPECIFICATIONS

Make		Mecc Alte
Model		ECP34 - 2S/4
Frequency	Hz	50
Power	kVA	105,00
Design		Brushless, 4 poles
Cos Phi		0,80
Phase		3
Voltage	V	400/230
Insulation Class		H
Temperature		H
Stator		2 / 3 steps
Rotor		Single Bearing System, Flexible Disc
Excitation System		Electronic (AVR)

➤ DIEMENSIONS AND WEIGHT

Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AC 110	1250,00	2150,00	1050,00	1563,00	240,00
Canopy	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AK 40	1600	3100	1057	1670	240

AC 110

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 602

1 P 602 - Control System



- 1 A U]b`gHh g`X]gd`Um`
- 2 8]gd`UmgVc`Vi`Hrcb`
- 3 DU[Yf]bZcfa U]cbE`Vi`Hrcb`
- 4 7 ca a cb`U`Ufa`]bX]W]Hrcf`
- 5 GHh g`@98`g`
- 6 C dYfU]cb`gY`YV]b[`Vi`Hrcbg`

2 Devices

8G9za cXY`*`\$\$`5i`hc`A`U]bg]: U]i`fY`V`b]fc`a`cXi`Y`
 6UHYfmVUf[Yf`]bdi`h%, !&*`(`j`c`h`z`ci`rdi`h`&+`Z`J`)`5`f&(`J`E`cf`%`z`J`c`h`)`5`f&J`E`
 9a`Yf[YbV]hrcd`di`g`Vi`Hrcb`UbX`Z`gYg`Z`f`V`b]fc`V]fV`]g`

3 Construction and Finish

7 ca dcbYb]g`]b]gU`YX`]b`g`Y`Y`h`Y`Y`b`W`c`g`i`fY`D`v`c`g`d`U`H`Y`W`Y`a`]W`z`d`f`Y`!`V`e`U`h`b[`c`Z`g`H`Y`d`f`c`j`]X`Y`g`V`e`f`f`c`g`]c`b`
 f`y`g`]g`h`U`b`h`g`i`f`Z`U`V`D`c`m`Y`g`Y`f`V`e`a`d`c`g`]Y`d`c`k`X`Y`f`h`c`d`V`e`U`h`Z`c`f`a`g`\\` \\`[`c`g`g`U`b`X`Y`i`f`Y`a`Y`m`X`i`f`U`V`Y`Z`]b`g`\\`@`c`V`U`V`Y`
 U`b`X`\\`]b[YX`d`U`b`Y`X`c`c`f`d`f`c`j`X`Y`g`Y`U`g`m`U`V`W`g`g`h`c`V`e`a`d`c`b`Y`b`]g`

4 Installation

7`c`b`]`f`c`d`U`b`Y`]`g`a`c`i`b`H`Y`X`c`b`V`U`g`Y`Z`U`a`Y`k`]`h`g`H`Y`g`H`U`b`X`\\`@`c`W`H`Y`X`U`h`h`Y`f`[`\\`h`g`]X`Y`c`Z`h`Y`[Y`b`Y`f`U`h`c`f`g`Y`h`f`k` \\`Y`b`m`c`i`
 `c`c`_`U`h`h`Y` ;`Y`b`G`Y`H`Z`c`a`5`H`Y`f`b`U`h`c`f`E`

5 Generating Set Control Unit

H`Y`8`G`9`*`\$\$`]`g`U`g`H`U`b`X`U`f`X`V`e`b]fc`a`cXi`Y`Z`f`ci`f`[Y`b`Y`f`U`h`c`f`g`Y`h`g`i`d`h`c`&`\$`_`J`5`U`b`X`i`h`\\`U`j`Y`V`Y`Y`b`X`Y`g`[b`Y`X`h`c`
 g`H`U`f`h`U`b`X`g`h`c`d`X`]Y`g`Y`U`b`X`[U`g`[Y`b`Y`f`U`h`c`f`g`Y`h`g`H`Y`8`G`9`*`\$\$`a`cXi`Y`\\`U`g`V`Y`Y`b`X`Y`g`[b`Y`X`h`c`a`c`b`]h`c`f`[Y`b`Y`f`U`h`c`f`
 Z`Y`e`i`Y`b`V`h`z`j`c`i`z`W`f`f`Y`b`h`z`Y`b`[]b`Y`c`[`d`f`Y`g`g`i`f`Y`z`V`e`c`U`b`h`Y`a`d`Y`f`U`h`f`Y`f`i`b`b`]b[`\\`ci`f`g`U`b`X`V`U`H`Y`f`m`j`c`h`g`A`cXi`Y`
 a`c`b`]h`c`f`g`h`Y`a`U`]b`g`g`i`d`d`i`m`U`b`X`g`k`]H`W`c`j`Y`f`h`c`h`Y`[Y`b`Y`f`U`h`c`f`k`\\`Y`b`h`Y`a`U`]b`g`d`c`k`Y`f`Z`]g`H`Y`8`G`9`*`\$\$`U`g`c`
]b`X`]W`H`Y`g`c`d`Y`f`U`h`c`b`U`g`H`h`g`U`b`X`Z`i`h`V`e`b`X`]h`c`b`g`z`5`i`h`c`a`U`h`W`m`g`\\`i`h`h`b[`X`c`k`b`h`Y` ;`Y`b`G`Y`h`U`b`X`[]`]b[`h`f`i`Y`Z`]f`g`h`i`d`
 Z`i`h`V`e`b`X`]h`c`b`c`Z` ;`Y`b`G`Y`h`Z`]i`f`Y`H`Y`@`7`8`X`]g`d`U`m`]b`X`]W`H`Y`g`h`Y`Z`i`h`

Standard Specifications

A`]W`c`d`f`c`W`g`g`c`f`V`e`b]fc`Y`X`
 @`7`8`X`]g`d`U`m`a`U`_`Y`g`]b`Z`c`f`a`U`h`c`b`Y`U`g`m`h`c`f`Y`U`X`
 (!`]b`Y`z`*`(`1`%`&`d`])`Y`X`]g`d`U`m`
 5`i`h`c`a`U`h`W`m`i`f`U`b`g`Z`f`g`V`Y`h`k`Y`Y`b`a`U`]b`g`f`i`h`h`m`h`U`b`X`[Y`b`Y`f`U`h`c`f`d`c`k`Y`f`
 A`U`b`i`U`d`f`c`[`f`U`a`a`]b[`c`b`Z`c`b`h`d`U`b`Y`
 I`g`Y`f`Z`]Y`b`X`m`g`Y`H`i`d`U`b`X`Vi`Hrcb`U`h`c`i`H`
 :`f`c`b`h`d`U`b`Y`d`f`c`[`f`U`a`a`]b[`
 F`Y`a`c`H`g`H`U`f`f`
 9`j`Y`b`h`c`[]`]b[`f`%`\$`g`\\`c`k`]b[`X`U`Y`U`b`X`h`a`Y`
 7`c`b`]`f`c`g`G`h`c`d`#`Y`g`Y`h`Z`A`U`b`i`U`z`5`i`h`c`z`H`Y`g`h`Z`G`H`U`f`z`Vi`Hrcbg`5`b`U`X`X`]h`c`b`U`d`i`g`Vi`Hrcb`b`Y`i`h`c`h`Y`@`7`8`X`]g`d`U`m`]g`
 i`g`Y`X`h`c`g`V`c`\\`h`f`c`i`[`\\`h`Y`a`cXi`Y`g`f`i`a`Y`h`f`]b[`X`]g`d`U`m`g`

AC 110

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 602

Instruments

9B: #9
 9b[]bY'gdYYX"
 C]'dfYggi fY"
 7cc'UbhY'a dYfUhi fY"
 F i b' hja Y"
 6UHYfmj c'rg"
 7cbZ[i fUVY' hja]b["
 ; 9B9F5HCF
 J c' hU[Y f@ @B' "
 7i ffYbhf@ @& @' "
 : fYei YbVW"
 A5-BG
 J c' hU[Y f@ @B' "
 : fYei YbVW"
 A U]bg'fYUXn'
 A U]bg'YbUV'YX"
 ; Yb"GYhfYUXn'
 ; Yb"GYhYbUV'YX"

Protection Circuits

K 5F B-B;
 7\Uf[Y Z]i fY"
 6UHYfm@ck # [\] c' hU[Y"
 : U] 'hc' ghcd"
 @ck # [\] [YbYfUhc'f j c' hU[Y"
 I bXYf#j Yf [YbYfUhc'f ZYei YbVW"
 Cj Yf# bXYf'gdYYX"
 @ck c]'dfYggi fY"
 <] [\ V'c' UbhY'a dYfUhi fY"
 G<I H8CK BG
 : U] 'hc' ghUff"
 9a Yf [YbVW'ghcd"
 @ck c]'dfYggi fY"
 <] [\ V'c' UbhY'a dYfUhi fY"
 Cj Yf# bXYf'gdYYX"
 I bXYf#j Yf [YbYfUhc'f ZYei YbVW"
 I bXYf#j Yf [YbYfUhc'f j c' hU[Y"
 C]'dfYggi fY'gYbgcf'cdYb"
 7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"
 9@97 HF =75@HF -D
 ; YbYfUhc'f j YfW'ffYbh'

Options

: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k]h' h'Ya dYfUhi fYz
 dfYggi fYz dYfVW'bhU[Y f'k Ufb]b[#]i h'Xck b# 'YVW'VW' h'f]dL
 @c'W'gYh]b['dUfUa YHfg'UbX'a cb]h'f]b['Zca 'D7' hc
 V'c'bfcc' a cXi 'Y'k]h' I G6 V'c'bbYVW'cb'fa Ul '* 'a H'

Standards

9'YVW'VW' 'GUZYhm#9A 7 'V'c'a dUfV']hm6G'9B '* \$-) \$
 9'YVW'VW' 'Vi g]bYgg' 'Yei]da Ybh'
 6G'9B '*%\$ \$! *! & 9A 7 'ja a i b]mighUbxUfX"
 6G'9B '*%\$ \$! *! ('9A 7 'Ya]gg]cb' ghUbxUfX"


Static Battery Charger

'6UHYfmVUf[Yf]g'a Ubi ZVW' fYX'k]h' 'gk]h'W]b[!a cXY'UbX'GA 8 'YVW'bc'c[mUbX'ih\Ug\] [\ YZ]V'YVW' 6UHYfmVUf[Yf
 a cXY'gfci hdi hJ !=VUfUW'f]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g'] 'Ua dYfz% z'] 'Zcf'& j c'hUbX' & + z'] 'Zcf'& ('] "
 #odi h% , ' ! & * (j c'h57 "' Dfc]bY' & (\$) \Ug'Z' "mici hdi hg\chV'VW]hdfchV'W]cb'UbX'ihVWb VY i gYX'Ug'U'W'ffYbhgci fVW"
 Dfc]bY' %& \$) #& (\$) V'Uf[Yf \Ug\] [\ YZ]V'YVW'cb["]Z'Z' "ck ZU]i fY'fUfYz'] [\ hk Y] [\ hUbX' "ck \ YUhfUX]UfYX']b
 UVW'cfXUbW'k]h' "]bYUf'U'fYfbU]h' Yg' H\Y'VUf[Yf]g'Z'hYX'k]h' U'dfchV'W]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[Y'Z]
 fY'UmV'c] VYhk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei]ddYX'k]h' F: =Z]h'f'hc' fYXi V'Y'YVW'VW' 'bc]gY'fUX]UfYX'
 Zca 'h'Y'XY'jVW"; Uj Ub]W' m]gc'UfYX']odi hUbX'ci hdi h]m]d]VW' m(_J 'Zcf\] [\ 'fY']UV']h'f'

AC 110

Engine : Cummins
 Alternator : Mecc Alte
 Control System : P 602

AK 40 - Canopy

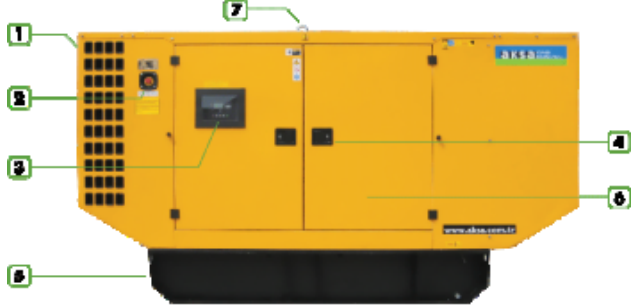

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

- Compact footprint, low profile design.
- Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package
- Body made from steel components treated with polyester powder coating
- Fire retardant foam insulation
- Easy access to all service points
- Exhaust system inside canopy
- Large doors on each side
- Control panel viewing window in a lockable access door
- Emergency stop push button mounted on enclosure exterior
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors.
- Lifting points on the top of canopy and base frame
- Customer options available to meet your applications needs.
- Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	1057
Length	mm.	3100
Height	mm.	1670
Fuel Tank Capacity	L	240